

**24*GE POE+4*10G
SFP+1*Console
Managed PoE Switch
DES-46S4MG-HD**



**Elevate Your Connectivity With
Our Latest Network Switches**



DES-46S4MG-HD

24*GE POE+4*10G SFP+1*Console Managed PoE Switch

- ☆ 24*10/100/1000M + 4*1G/2.5G/10G SFP+ slot Managed PoE Switch,1-24 ports support IEEE 802.3af/at
- ☆ Comply with IEEE 802.3, IEEE 802.3u, IEEE802.3ab,IEEE802.3z standards;
- ☆ PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power: 30W/port;
- ☆ Support QOS, STP/RSTP, IGMP, DHCP, SNMP, WEB, VLAN, ERPS etc.;
- ☆ POE port can be real-time network management, timed on/off, can force POE working mode, real-time display of POE port power;
- ☆ The power supply total is 400W;

Introduction;

The DES-46S4MG-HD is a 10G uplink layer two plus managed PoE switch. It has 24*10/100/1000Base-T RJ45 ports and 4*1/2.5/10G SFP+ fiber slot ports. Port 1-24 can support IEEE 802.3af/at standard PoE power supply. single port PoE power reaches 30W, and the maximum PoE output power is 400W(at-600W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, building visual access control intercom, etc. through a network cable to meet the network environment that needs high-density PoE power supply. It is suitable for hotel, campus, factory dormitory and small and medium-sized enterprise. The DES-46S4MG-HD has the layer two plus full network management function, supports IPV4/IPV6 management, supports static route full line rate forwarding, supports complete security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as PoE power management, port traffic control, VLAN division, and SNMP through the Web network management mode.

Technical Specifications;

Model	DES-46S4MG-HD
Interface	24*10/100/1000Base-T/TX PoE ports (Data/Power) 4*1G/2.5G/10G Base-X uplink SFP slot ports (Data) 1 * RS232 console port (115200, N,8,1)
PoE Port	Port 1-24 can support IEEE 802.3af/at PoE standard
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X IEEE802.3ae 10GBase-SR/LR IEEE802.3x
PoE Standard	IEEE802.3af/at
Ethernet port	10/100/1000Base-T(X), Auto-Detection, Full/half duplex MDI/MDI-X self-adaption
Ethernet Port Feature	Port 1-24 can support 10/100/1000BaseT(X) auto detect, full/half duplex MDI/MDI-X adaptive
Fiber port Feature	1G/2.5G/10G SFP fiber interface (Fiber module is not included, need to order separately, module optios include single/multi-mode, single/dual fiber, LC)
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	598Gbps (non-blocking)
Forwarding Rate	107.14Mpps
MAC	32K
Buffer Memory	32M
Twisted Pair Transmission	10BASE-T:Cat3,4,5 UTP(≤100 meter) ; 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T:Cat5e or later UTP(≤100 meter)
Optical Cable	Multi-mode:850nm 0~300M(10G),850nm 0~500M (1.25G); Single-mode:1310nm 0~40KM,1550nm 0~120KM.
Power Supply Pin	Default: 1/2(+),3/6(-)
Working Voltage	DC power supply, DC48-57V ultra-wide supply voltage, 5P Phoenix terminal connection, support anti-reverse protection
Max Power Per Port	30W/15.4W
Total PWR / Input Voltage	400W (AC100-220V)
Power Consumption	Standby<10W; Full Load<400W
LED Indicator	PWR (green); system indicator's SYS (green); Network Indicator: Link/Act (yellow); SFP Indicator: L/A (green); PoE Indicator: PoE (green)
Power Supply	Built-in power supply, AC 100~220V 50-60Hz

Technical Specifications;


Model	DES-46S4MG-HD
Reset Switch	Yes, One-button factory reset
Storage TEMP / Humidity	-40~+85°C;5%~95% RH Non condensing
Dimension	440*290*44.5mm
Net /Gross Weight	<4.4kg / <5.0kg
Lightning protection / protection level	IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-5(Lightning protection/Surge): Power:CM±4kV/DM±2kV; Port: ±4kV IP30
Installation	Desktop, 19-inch 1U cabinet
Certification	CCC; CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;
Managed Feature	
Interface	IEEE802.3x flow control (full duplex) Broadcast storm suppression for port rate support speed limit for incoming and offline message traffic, with a minimum particle size of 64Kbps. Temperature protection setting Energy saving configuration of port IEEE Ethernet
PoE Management	Total power limit of PoE power supply PoE output power allocation per port, close /af/at PoE output priority configuration for each port PoE working state display per port Power delay start PoE work and time scheduling
Layer 3 Function	Support L2+ managed function, Support IPV4/IPV6 management Support layer3 soft routing (weak three tier) forwarding, Support different network segments, communication between different VLAN Support static routing / default routing 128, 1024 ARP software forwarding
VLAN	Support port based VLAN (4K), IEEE802.1q

Technical Specifications;

Model	DES-46S4MG-HD
	<ul style="list-style-type: none"> Support protocol based VLAN Support Access, Trunk, Hybrid three types of port configuration Support QinQ configuration
Port Aggregation	<ul style="list-style-type: none"> Support LACP Support static polymerization Support the largest 8 aggregation groups, each aggregation group supports 8 ports
Spanning Tree	<ul style="list-style-type: none"> STP (IEEE802.1d) RSTP (IEEE802.1w) MSTP (IEEE802.1s)
Industrial Ring Network Protocol	<ul style="list-style-type: none"> Support G.8032 (ERPS), support 255 loops at most, and supports 1024 devices per ring. The self healing time of the ring network is less than 20ms
Multicast	<ul style="list-style-type: none"> Support IGMP Snooping V1/V2 and support 1024 multicast groups at most. Support the user's quick departure mechanism Support MLD Snooping V1/V2 Support multicast VLAN
Mirror	Bi-directional traffic mirroring supporting the basic port
QoS	<ul style="list-style-type: none"> Diff-Serv QoS Each port supports 8 output queues Support 802.1p/DSCP priority mapping Support queue scheduling mechanism (SP, WRR, SP+WRR) priority tag Mark/Remark stream based packet filtering Support for stream based redirection Support flow based speed limit
ACL	<ul style="list-style-type: none"> Support L2 to L4 packet filtering function, can match the first 80 bytes of the message, provide based on the source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN and other definition ACL. Support ACL based on port and VLAN
Safety Characteristics	<ul style="list-style-type: none"> Support user grading management and password protection Support IEEE802.1X authentication / centralized MAC address authentication Support AAA&RADIUS authentication Support the number of MAC address learning restrictions Support MAC address black hole Support SSH 2 to provide secure passwords for user login. Support SSL to ensure data transmission security Support port isolation Support the speed limit function of ARP message Support IP source address protection Support ARP intrusion detection function

Technical Specifications;

Model	DES-46S4MG-HD
	Support against DoS attacks Support port broadcast message suppression Support host data backup mechanism Binding capabilities of IP+MAC+VLAN+ ports
Remote Management	Shall support remote management through SNMP traps
DHCP	Support DHCP Client Support DHCP Snooping Support DHCP Serve Support DHCP Relay
Management and Maintenance	Support Console/AUX Modem/Telnet/SSH2.0 CLI command line configuration Support WEB network management (HTTPS) Support FTP, TFTP, Xmodem, SFTP file download management Support SNMP V1/V2C/V3 Support one bond reduction Support NTP clock Support system work log Support Ping detection Support cable state detection Support CPU instant utilization status view Support link layer discovery protocol LLDP Support NMS intelligent management center
System Requirements	Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later; Cat5e or later Ethernet cable; TCP/ IP, network adapter and network operating system (Microsoft Windows, Linux or Mac OS X) installed on on every computer in the network.

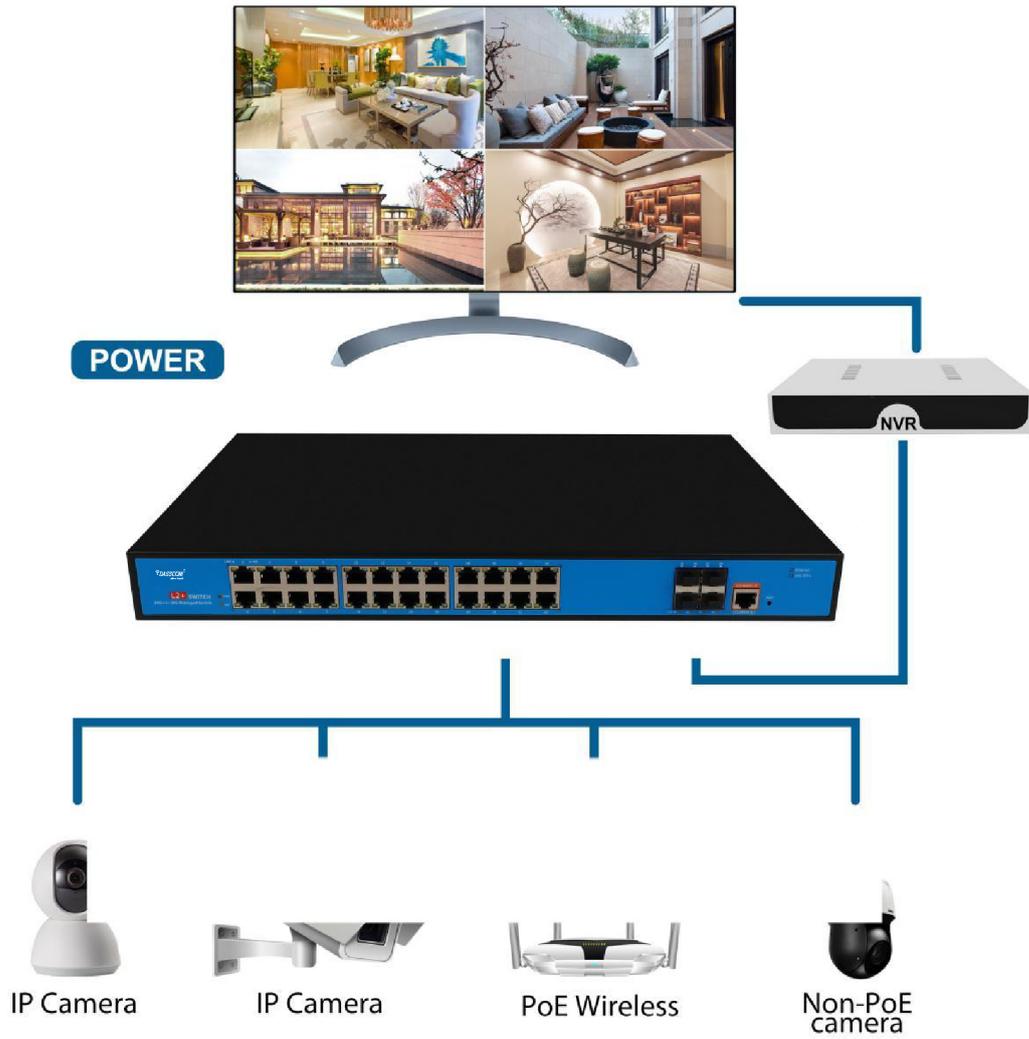

PACKING LIST

CONTENT	QTY	UNIT
28 Ports Managed PoE Switch with 4*10G SFP (DES-46S4MG-HD)	1	SET
Hanging Ear	1	PAIR
User Guide	1	PC
Warranty Card	1	PC